



Italian excellence since 1906

## OIL-DEFENDER™ Elevator Sump Control System

- The Oil-Defender™ single phase simplex control panel is used for the safe operation of pumping, alarming, and monitoring of elevator sump pits, transformer vaults, and leachate well applications.
- The control panel will activate a pump to remove water from pits in accordance with ASME A17.1, stopping the pump before oil or other harmful substances enter the water supply.
- The control panel comes with a pre-installed female pump power receptacle, incoming system power cable, preset level sensor, alarm test/silence switch, and alarm buzzer.
- 6' cord option available




# OIL-DEFENDER™

## ELEVATOR SUMP CONTROL



Performance	PAN92055		PAN92075		PAN92100	
	Head	GPM	GPH	GPM	GPH	GPM
0'	75	4500	80	4800	100	6000
5'	70	4200	75	4500	91	5460
10'	64	3840	69	4140	82	4920
15'	57	3420	61	3660	72	4320
20'	50	3000	55	3300	63	3780
25'	40	2400	45	2700	54	3240
30'	-	-	29	1740	44	2640
40'	-	-	-	-	34	2040
50'	-	-	-	-	25	1500

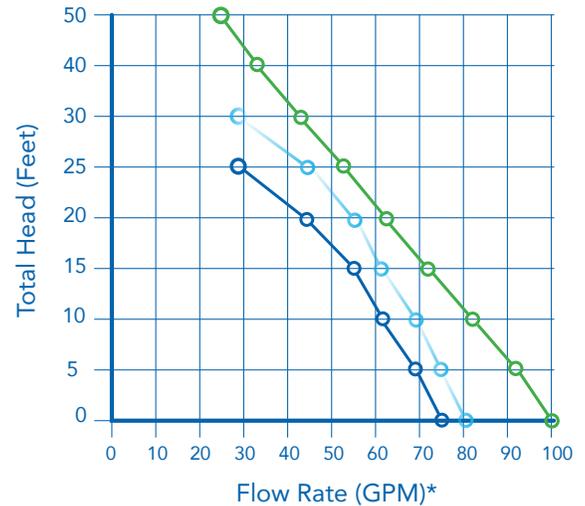

\*Based on using 2" PVC discharge pipe.

**75/3** Year Warranty  
Gallons Per Minute

**80/3** Year Warranty  
Gallons Per Minute

**100/3** Year Warranty  
Gallons Per Minute

Kit Model	Pump Model	HP	Volts	Amps	Construction	Discharge Size	Cord	Solids	Warranty
PAN92055	PAN91559	1/2	120	7.5	SS/Cast Iron	2" / 1-1/2"	25'	1/2"	3 Years
PAN92075	PAN91759	3/4	120	10	SS/Cast Iron	2" / 1-1/2"	25'	1/2"	3 Years
PAN92100	PAN91159	1	120	12	SS/Cast Iron	2" / 1-1/2"	25'	1/2"	3 Years



**Panelli Pump**  
45 Maryland Avenue East  
Saint Paul, MN 55117

**1-800-495-9278**

